

# MINI SERVER CABINET

## 600MM WIDE WITH PERFORATED DOORS



### Equipped with

- ◆ Removable side walls
- ◆ Floor and roof plate with prepared ventilation openings
- ◆ 4x 19 inch profile with height indication
- ◆ Doors to open both on the right side and on the left side
- ◆ Cable entry at the top and bottom
- ◆ Front door, rear door and side walls equipped with locks
- ◆ Assembled delivery
- ◆ Fully demountable


### Maximum load

- ◆ 800 kg

### Included


- ◆ 20 cage nut sets
- ◆ 4 height adjustable feet
- ◆ 8 keys (2 per lock)

# SPECIFICATIONS

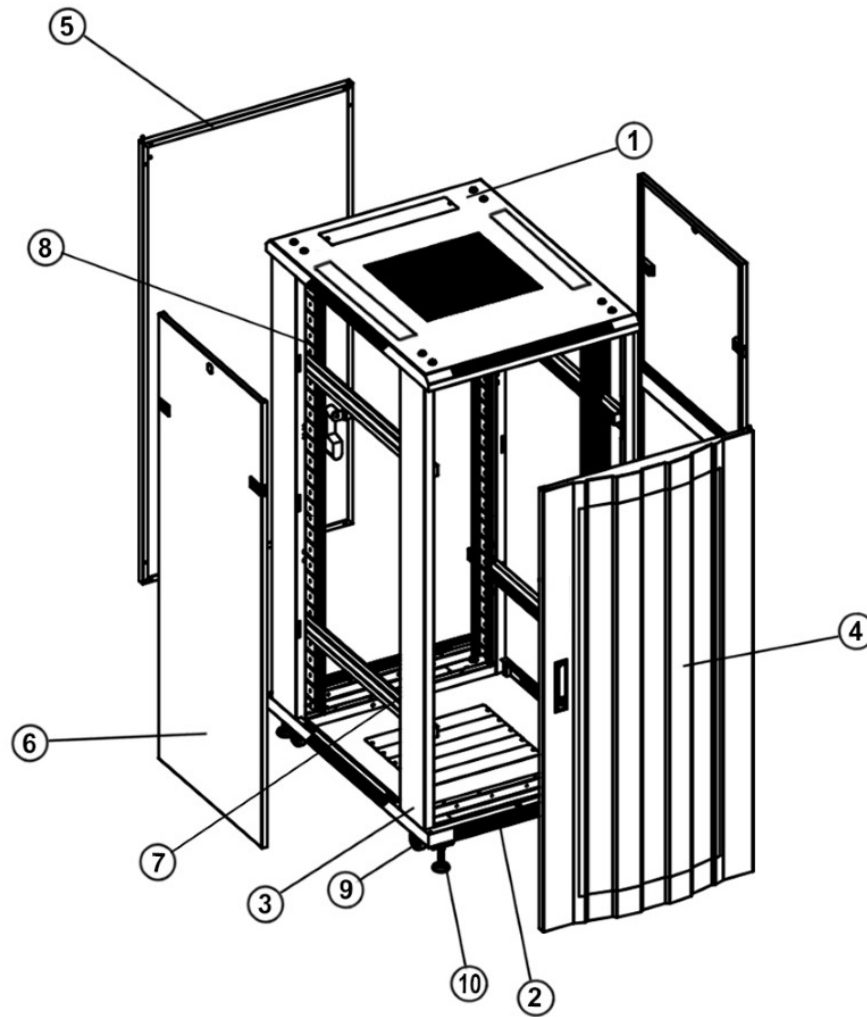


Number	Name	Amount
1	Top plate with cable entry	1
2	Bottom plate	1
3	Doorframes	2
4	Perforated front door with lock	1
5	Perforierte Rücktür mit Schloss	1
6	Removable side walls with lock	2
7	Horizontal crossbars	6
8	Vertical profile rails	4
9	Height adjustable feet	4


# DETAILED DRAWING

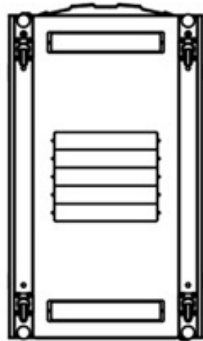


Bottom view

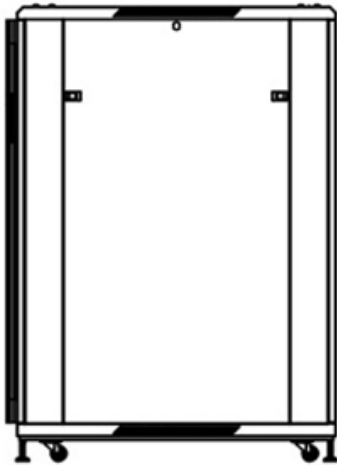


Side view

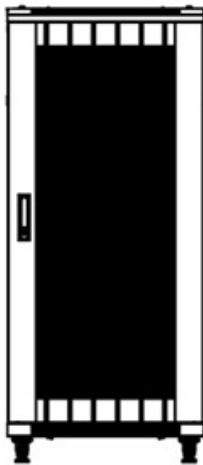


Front view

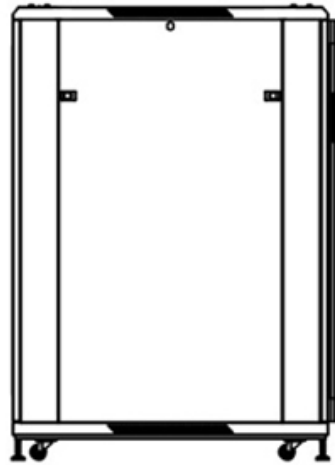

Side view

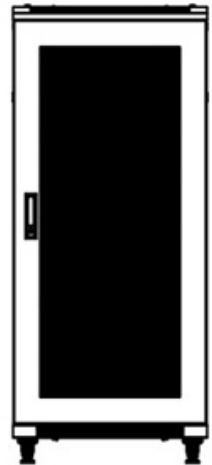


Back view

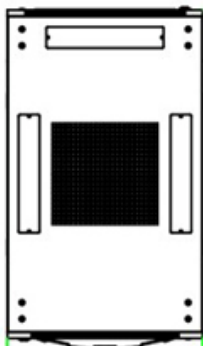


Top view

## OPTIONS

Our mini server cabinets have a curved perforated door at the front and a straight perforated door at the back.

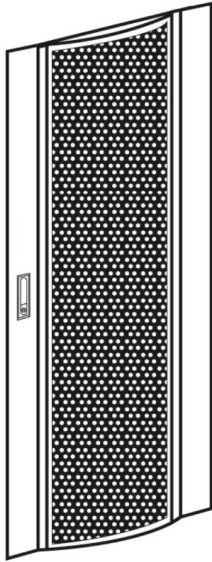

Curved perforated front  
door

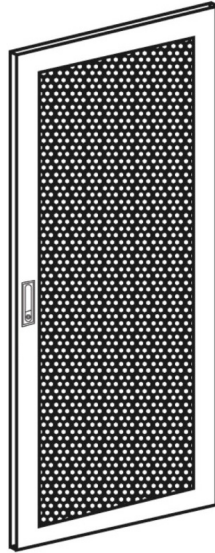


Straight perforated back  
door

## EXPLANATION ITEM NUMBERS

Our mini server cabinets are available in various sizes. The item numbers are based on the dimensions of our server cabinets, making it particularly easy to find the right server cabinet.

### DS6618

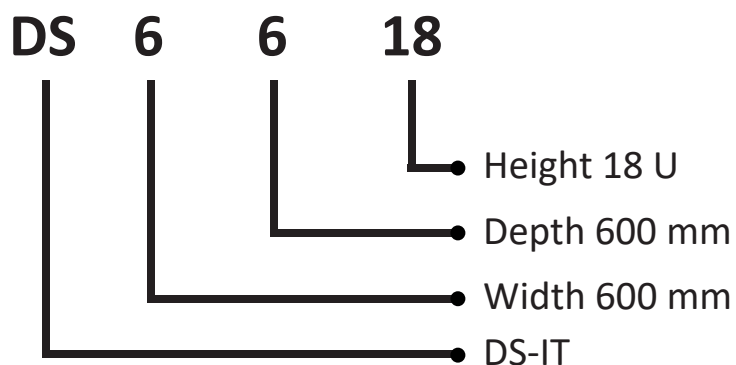

## POSSIBLE DIMENSIONS

Width		Depth		Height		Specifications	
600 mm	6	600 mm	6	12U	12	Perforated door	PP
		800 mm	8	15U	15		
		1000 mm	0				

Example 1: **600** mm wide x **800** mm deep x **12** HE high => 6-8-12 = DS6812

Example 2: **600** mm wide x **1000** mm deep x **15** HE high => 6-0-15 = DS6015

## ITEM NUMBERS MINI SERVER CABINETS 600MM WIDE WITH PERFORATED DOORS

Model	Height	Dimensions in mm (WxDxH)	Dimensions in mm (WxDxH) including packaging	Weight in kg
DS6812PP	12U	600 x 800 x 720	650 x 850 x 855	40
DS6012PP	12U	600 x 1000 x 720	650 x 1050 x 855	44
DS6815PP	15U	600 x 800 x 860	650 x 850 x 985	44
DS6015PP	15U	600 x 1000 x 860	650 x 1050 x 985	48